




electrónica de precisión, s.a.

C./ Galileu, 17 Polígono Industrial Can Estella
E-08635 Sant Esteve Sesrovires
BARCELONA


Tel.: +34 93 774 69 10
Fax.: +34 93 774 65 00
e-mail: epsa@edep.com
http://www.edep.com



Double Remaining Heat Indicator Type 422

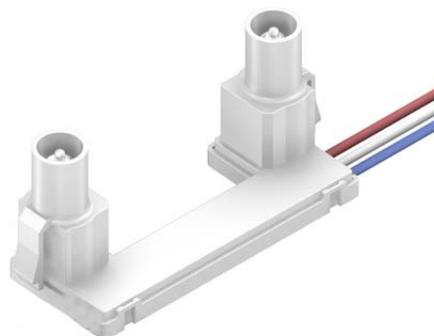


R.H.I.L.
connection right

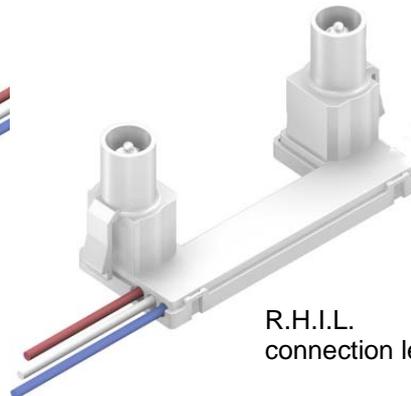

R.H.I.L.
connection left

Example 2x chained

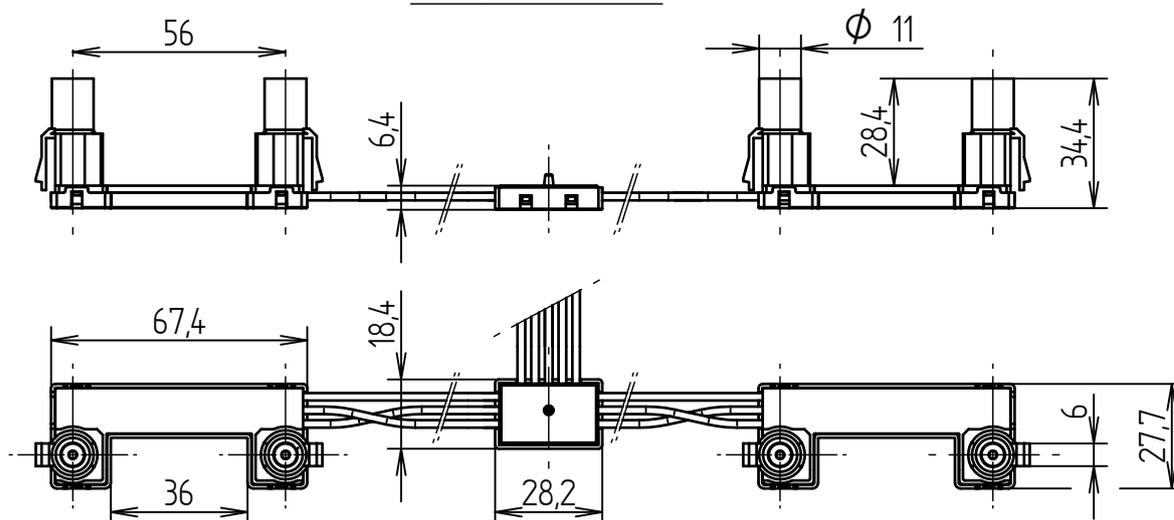

Tolerances unless otherwise stated: ± 0.2

Double indicator light for building in.


For use at high temperatures as backlighting behind a diffuse panel, f.e. in glass ceramic appliances as residual heat indicator, fixed by snap-in.

Different voltages, brightnesses, resistances to temperature, conformity marks and also with special specifications available.

For details, please see our web page.

Recommended cutout

Panel thickness: $0,8 \pm 0,03$

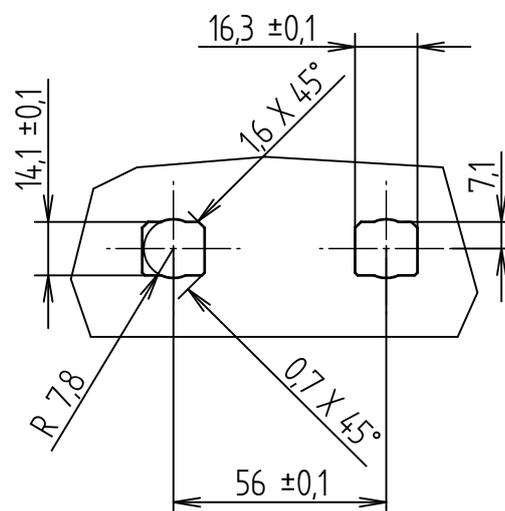

Scale: 1:2



electrónica de precisión, s.a.

C./ Galileu, 17 Polígono Industrial Can Estella
E-08635 Sant Esteve Sesrovires
BARCELONA

Tel.: +34 93 774 69 10
Fax.: +34 93 774 65 00
e-mail: epsa@edep.com
<http://www.edep.com>



Technical specifications series 422

This double or single indicator light for building in is designed for snap-in mounting to rear panel and to be used at high ambient temperatures.

The thermoplastic housing incorporates the fixing elements, the connection means and also the lighting means.

It is usually placed behind a diffusing panel (f. e. of ceramic glass).

Following specifications are a guide for end users:

Connection means: Lead wires (cables)

Ambient temperature: To be used at a ambient temperature of maximum 180 °C

Rated voltage: 250V (can be used down to 220V)

Nature of supply: AC and DC

Lighting means: Neon glowlamp

Colour of lighting mean: orange

Applicable standard: VDE 0710 and, as far es applicable, IEC 598 (EN 60 598)

Conformity marks:  available

Voluntary conformity marks: VDE-Reg.-Nr. 118212

Notes and other technical specifications:

Life expectancy: The ultra high bright glowlamps have an average life of 10.000 hours at ambient temperature of 25°C. These values are given for AC supply and standard types. Please ask for specifications for other types.

Other voltages: Under request also other voltages for different natures of supply can be offered.

Other ambient temperature: If the indicator light has to work at other ambient temperatures, ask for special quote.

Brightness: Our indicator has a very high brightness light output. Other brightnesses available under request. The life expectancies vary from those specified above.

Cables: Depending on ambient temperature of use, different types of flexible conductors with 0.5 mm² cross section are used.

Order Instructions

For orders, please indicate: Type reference, number of signals and if only one also his position, voltage, connection means (in detail) and ambient temperature of use. The detail of the connection means is mainly required for the execution with lead wires (cables), where colours, type of conductors, lengths and finishes of ends (f. e. with connectors) will be necessary. As usually every customer has different requeriments regarding this connection mean, we do not establish any standard execution.

Examples: Indicator light, double, 422, 250V, wires (cables) to left and according to drawing or sketch or specifications

Any special requeriment (f. e. specific plastic raw material, other ambient temperature, other lighting means, other voltages, other finish of cables, a. s. o.) is considered a special execution and his supply and order identification has to be confirmed specially by us.

These details are necessary for the first order and to be in accordance with the prescriptions of product identification of the standard(s) and (or) of the certification institute(s).

For following orders this can be substituted by a code of ten numbers which we assign to all our products and coincides with our drawing number, which usually has to be made to assure correct product identification.